DYNAFLEX DF 9.3

SPECIFICATIONS

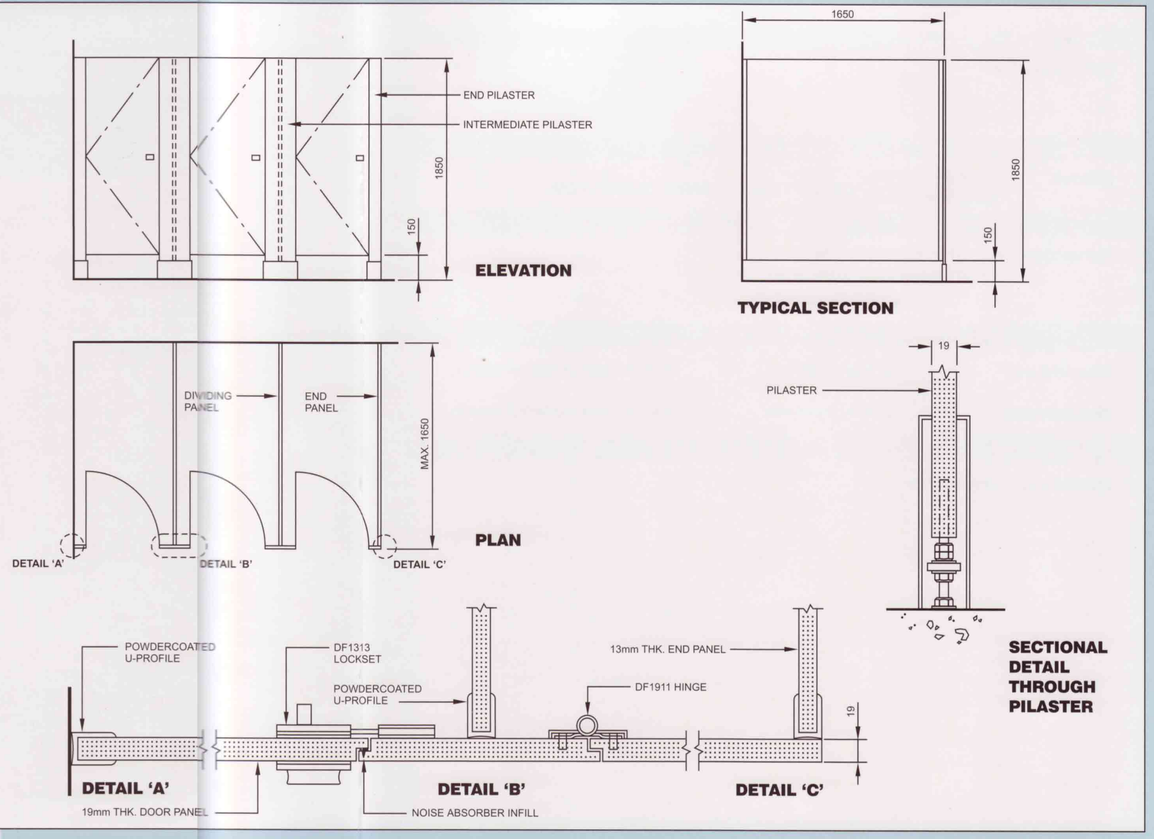

ACCESSORIES

DF1911 HINGE

DF1312 HOOK

DF 13 LOCKSET

MATERIALS
All toilet cubicles are constructed from a combination of 19mm and 13mm thick solid phenolic core panel with melamine finish on both sides equipped with stainless steel accessories.

DOORS
All door panels shall be of 19mm thick, fixed to the pilaster with 3 nos of hinges completed with a coat hook and lockset.
Standard door size of 600mm / 900mm (For handicap only)

PILASTERS
Pilasters shall be of 19mm thick, fixed onto the floor by use of treated stud and completed with stainless steel pilaster shoe in hairline finish.
Vertical edges of pilaster shall be rebated, complete with rubber infill acting as a noise absorber to receive door panel.

DIVIDING PANELS
All diividing panels of 13mm thick shall be fixed to the wall and the pilaster panel using U-profile on both end with a floor clearance of 150mm.

OVERALL MEASUREMENT
Standard height of 1850mm including 150mm floor clearance. Cubicles depth where a dividing panel is required shall be allowed up to a maximum of 1650mm. Cubicle width, for better stability of the cubicle is recommended to be at least 900mm.
Other special measurements are available by request only.

WASHROOM ACCESSORIES
Available upon request under separate quotation.
Toilet paper holder
Paper towel dispenser
Handicap hand rail
Soap dispenser
Others...